


# ORCA™ Low Profile

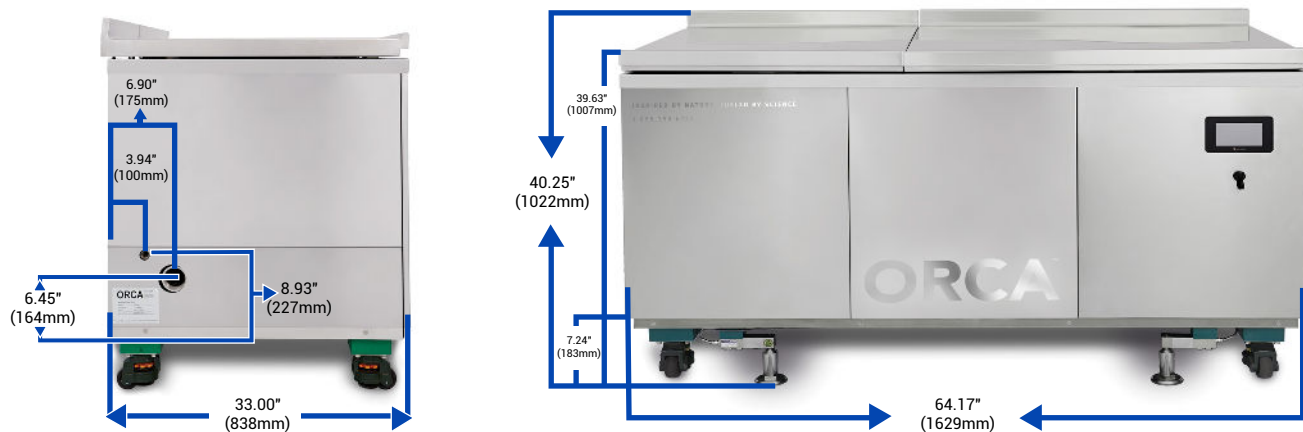

## MODEL LOW PROFILE SPECIFICATIONS

Height may differ by 5cm

<b>REQUIRED SUPPLIES</b> ORCA Biochips, microorganisms & wipers from ORCA Digesters	<b>DIMENSIONS</b> L64.17" x W33.00" x H40.25" (L 162.9 cm x W 83.8 cm x H 102.2 cm)
<b>WEIGHT</b> 1235 lbs	<b>HOURLY PROCESSING CAPACITY</b> Average of 50 lbs (23 kgs) per hour
<b>ELECTRICAL CONSUMPTION</b> 1.2 kWh	<b>WATER CONSUMPTION</b> 114 gallons (430 litres) per day* *Calculated based on an incoming flow rate of 2 gallons (7.6 litres) per minute*
<b>INSTALLATION REQUIREMENTS</b> Electrical – Dedicated 120V–220V Electrical Cord Length – 72 inches (183 cm) Water – Male GHT cold water connection Drain – Min. 2.5 sanitary drain complete with grease interceptor	

## FEATURES

- Aerobically processes an average of 50 lbs (23 kgs) of food waste per hour
- On-board scales for diversion tracking, with an extractable data file through ethernet or USB
- Online customer portal for diversion goal tracking and reporting
- Flat top work surface for optimal space efficiency
- Food-grade stainless steel construction
- Food waste can be added continuously until maximum capacity is reached
- Safety control turns off the machine when the door is opened
- Engineered for quiet operation, with a touch screen HMI
- Utilizes ORCA Biochips to hold high levels of microorganisms that digest organic waste
- Effluent (liquid waste) from machine tested safe to enter the wastewater system

